



# POLY-W Card Set Up & Checklist 2009

CMYK front

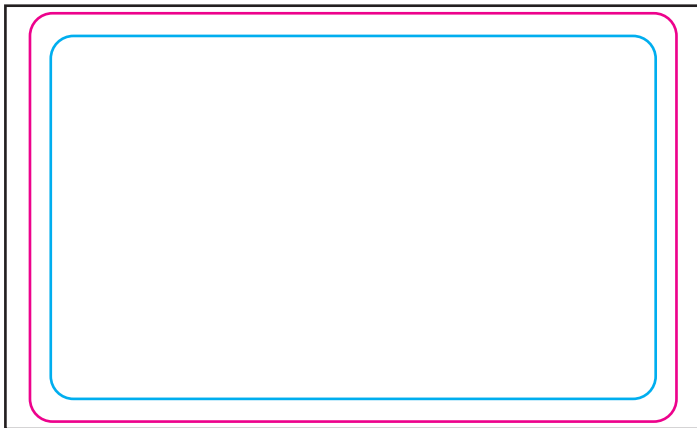

CMYK back

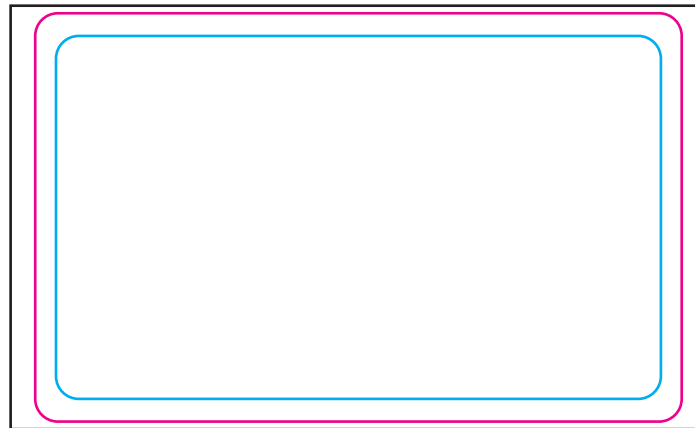

Black line is bleed area, 92x56mm. All objects need to stay inside this area, images, backgrounds etc.

Pink line is trim line 85.5x54mm with a 3mm radius corner. This will be final size of the card.

Blue line is SAFE area, any important text, images etc should remain inside this area.

## Check List

1. All Dimensions need to be correct to the above description.
2. File needs to be in CMYK.
3. Make sure all fonts are outlined.
4. Check that images are 300dpi or above and that they are embedded NOT linked.
5. If there are black colours, select them to make sure they are not photoshop black. C75 M68 Y67 K90 is photoshop black if colours are simlair to this please change to be a solid mix of C30 M30 Y30 K100. This will give you a rich black.




## Signature Panels


When creating a signature panel place it where you would like it to go on the card and then duplicate it exactly below. Select the signature panel area and set it to 100K. We will then use this in creating the plate for the signature panel. Signature panels need to go all the way to the bleed edge. We recommend them to be at least 10mm high.

## Consecutive Number Printable area

Portrait

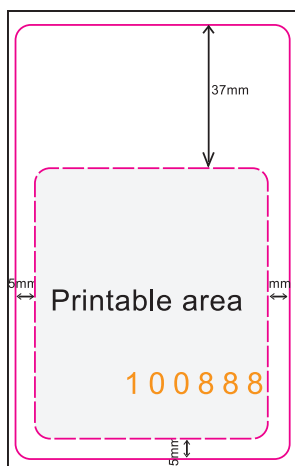

Landscape

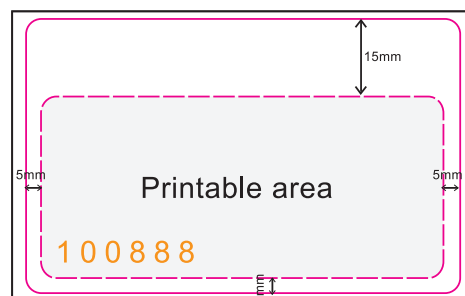

6-digit	5-digit	4-digit	3-digit
27x5mm	22x5mm	17x5mm	13x5mm

Font size : Arial 18pt with 200pt tracking.